



# Evaluation of Compressive Strength in Various Timbers for Agricultural Implements in Pantnagar, Uttarakhand, India

Annu Rani <sup>a\*</sup>, Jayant Singh <sup>b</sup>, T.P. Singh <sup>b</sup>, Ajit Kumar <sup>a</sup>  
and Mukesh Kumar Choudhary <sup>c</sup>

<sup>a</sup> Teerthanker Mahaveer University, Moradabad, Uttar Pradesh, India.

<sup>b</sup> Govind Ballabh Pant Agriculture and Technology, Pant Nagar, Uttarakhand, India.

<sup>c</sup> Sri Karan Narendra Agriculture University, Jobner, Rajasthan, India.

## Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

## Article Information

DOI: <https://doi.org/10.9734/acri/2024/v24i5754>

## Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/119195>

**Original Research Article**

**Received: 24/04/2024**  
**Accepted: 27/06/2024**  
**Published: 01/07/2024**

## ABSTRACT

This study investigates the compressive strength of various timber types, including Red Cedar, Java Plum, Mango, Yellow Teak, Margosa, Eucalyptus, Teak, North Indian Rose timber, Lebbeck, and Sal. The compressive strengths of these timbers were measured to be 43.79, 50.42, 78.00, 71.16, 68.32, 69.88, 80.78, 85.50, 65.12, and 81.20 MPa, respectively. North Indian Rose timber and Sal exhibited the highest compressive strengths, suggesting their superior suitability for applications requiring high compressive resistance. Conversely, Red Cedar showed the lowest

\*Corresponding author: Email: [annuchaudhary39@gmail.com](mailto:annuchaudhary39@gmail.com);

**Cite as:** Rani, Annu, Jayant Singh, T.P. Singh, Ajit Kumar, and Mukesh Kumar Choudhary. 2024. "Evaluation of Compressive Strength in Various Timbers for Agricultural Implements in Pantnagar, Uttarakhand, India". *Archives of Current Research International* 24 (5):785-91. <https://doi.org/10.9734/acri/2024/v24i5754>.

compressive strength among the timbers tested. The standard deviations for these measurements were Java Plum (0.07), Mango (0.28), Yellow Teak (0.36), Teak (0.45), Margosa (0.52), Eucalyptus (6.11), Red Cedar (0.69), North Indian Rose timber (0.79), Lebbeck (0.93), and Sal (0.68), with Mango displaying the lowest variation. The findings indicate that North Indian Rose timber and Sal are particularly robust, while Mango exhibits consistent compressive strength, making these timbers preferable for specific structural applications.

*Keywords: Compressive strength; material properties; standard deviation; timber performance; high compressive resistance.*

## 1. INTRODUCTION

"Agriculture in India had developed in remote antiquity, and down to the 18th century, India ranked among a few developed countries of the globe. Indigenous tools were basic but well-designed suit farmer's needs. Traditionally farmers have been using a variety of tools in their everyday life, often for agricultural operations and household purpose. Agricultural implements used in 18th and 19th centuries were mostly hand operated and animal drawn. The fresh development in new designs of implements and tools was noticed around independence. Most of the timber tools, implements use local timber materials – different timbers for particular tools and strings for various uses come from different plants" [1,2-6]. "The present investigation was carried out to determine the Compressive strength of various types of Timbers used for agricultural implements in Pantnagar, Udam Singh Nagar, Uttarakhand" [7-11,12-14]. This study provides information for selection criteria of timber to make a different component of agriculture implement and tools. This study was mainly targeted on utilization of different type of timber for their use to make different components of agricultural implements and tools.

## 2. EXPERIMENTAL DETAILS

### 2.1 Timber

Timber is light weighted, durable and economical. Timber is a natural polymer and its molecular structure is established on the cellulose chain whose cell wall comprises cellulose fibers which were laterally arranged to its axis [15-21]. The timber is the intermediate and in fact the main zone of the tree. Timber subsists of four main chemical groups represented in Table 1. The cellulose and hemicellulose groups are the carbohydrates (sugar molecules) which make up the majority of the cell wall. Lignin performs as a "glue" to bind the cells together into a stiff/strong material. "The

extracts are chemicals that are deposited in the cells and provide unique properties to timber, such as the natural resistance to biological deterioration. Timbers with a high degree of natural resistance have approximately high percentage of biocidal extracts (Author). The total extractive content of few species can be as high as 20 to 30%; these species commonly have a high proportion of biocidal extracts" [11].

Various samples have been prepared in different proportion considering different properties of timber there after tested for Mechanical properties and compare which one has best strength sample among the all sample. The testing was conducted by using Universal Testing Machine.


### 2.2 Collection of Various Types of Timber

Destructive method of sampling was adopted to collect the timber samples. The tree of Sheesham, Sal, Yellow Teak, Red cedar, Teak, Margosa, Java plum, Eucalyptus, Lebbeck and Mango were felled and converted into logs of one meter length which are used for preparation of samples for mechanical property analysis. Mechanical tests were conducted as per the Indian Standard Specification IS 1708 by Universal Testing Machine (AMT-SC, A.S.I make).

### 2.3 Compression Testing

The Compression test is simply the opposite of the tension test with respect to the direction of loading. In any materials like brittle and fibrous ones, the tensile strength is appreciably contrasting from compressive strength. Therefore, it is necessary to test them under tension and compression separately. Compression tests results in mechanical properties that consist of the compressive yield strength, compressive ultimate strength, and compressive modulus of elasticity in compression, The percentage reduction in length


etc. All the compression tests of different woods are conducted on 25kN servo hydraulic UTM machine (AMT-SC, A.S.I make). Specimen configuration is shown in Fig. 3.

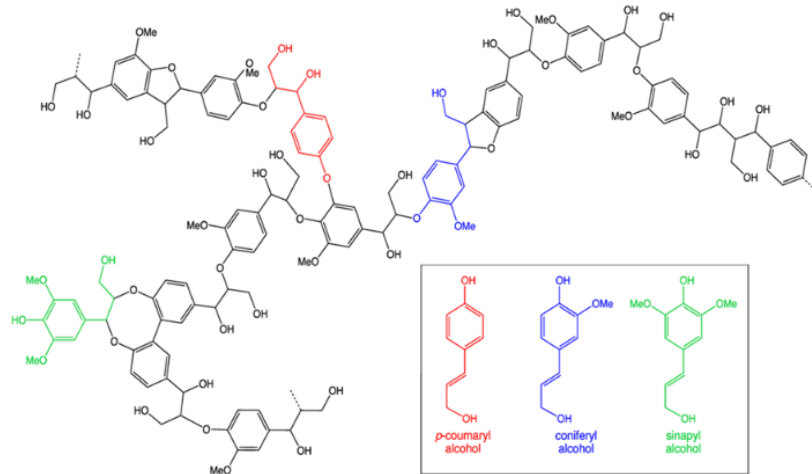


**Fig. 1. Chemical structure of lignin, which comprises approximately 30% of timber and is responsible for many of its properties**

**Table 1. Chemical constituents of timber**

Compound	Description	Amount (Percent of total mass)
Cellulose	Long chain of glucose molecules	40-50
Hemicellulose	Long chains of sugar molecules other than glucose	25-30
Lignin	Complex organic compounds that help bond cells together	15-20
Extracts	Compounds that are not an integral part of the cell wall	< 15
Ash	Inorganic elements in timber	< 1

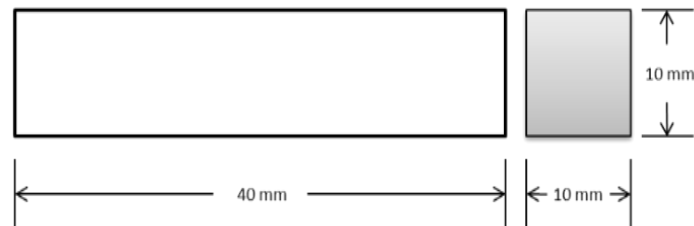

**Fig. 2. Specimen geometry of Compression test (IS 1708 (part - 9:1986))**

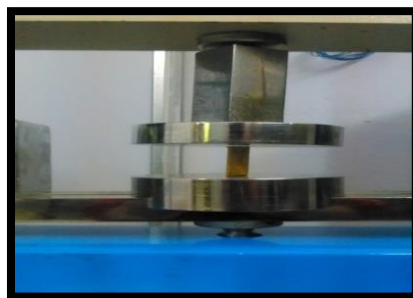

**Fig. 3. Test setup for Compressive strength**

### 3. RESULTS AND DISCUSSION

The results of the compressive test are discussed in this section. The compressive tests were carried out using controlled Universal Testing Machine (AMT-SC, A.S.I make). Compressive strength plays an important role to provide good strength for agricultural implements. Compressive strength was tested at different types of timber Ultimate compressive strength found from the stress- strain curve. The stress-strain curves of timber were presented in Fig. 4.


It was concluded from Table 2 that the Compressive strength of different types of timber red cedar, Java plum, Mango, Yellow teak, Margosa, Eucalyptus, Teak, North Indian Rose timber, Lebbeck and Sal were 43.79, 50.42, 78, 71.16, 68.32, 69.88, 80.78, 85.50, 65.12 and 81.20 MPa. Similar patterns of compressive strength were observed in the research findings of Izekor D. N. and Fuwape J. A. [22].

North Indian rose timber and Sal had a good compressive strength over all types of timber, but red cedar has lower compressive ultimate strength as compared to other types of timbers. Hence North Indian rose timber proved itself more suitable timber rest of the other types of timber. And their standard deviations were as follows Java plum (0.07), Mango (0.28), Yellow teak (0.36), Teak (0.45), Margosa (0.52), Eucalyptus (6.11), Red cedar (0.69), North Indian Rose timber (0.79), Lebbeck (0.93) and Sal (0.68) respectively. Mango has less standard deviation compared to other types of timber.


The ANOVA results shown in Table 3 which indicate that there are statistically significant differences among the means of the groups for the factor being tested, as evidenced by the large F-value (12375.9) and the p-value (0.001), which is much less than the significance level of 0.05. The factor has a significant effect on the dependent variable, and the null hypothesis (that there are no differences among group means) is rejected.

**Table 2. Compressive strength and Parentage reduction in Compressive test**

S.No	Types of timber	Compressive ultimate strength (MPa)		(% Reduction)	
		Mean	S.D.	Mean	S.D.
1.	Yellow teak	71.16	0.36	7.05	0.10
2.	Red cedar	43.79	0.69	11.77	0.56
3.	North Indian rose timber	85.50	0.79	7.83	0.92
4.	Teak	80.78	0.45	8.41	0.81
5.	Lebbeck	65.12	0.93	9.15	0.60
6.	Java plum	50.42	0.07	6.67	0.45
7.	Eucalyptus	69.88	6.11	9.33	0.47
8.	Margosa	68.32	0.52	7.63	0.15
9.	Mango	78.0	0.28	6.32	0.38
10.	Sal	81.20	0.68	6.46	0.33

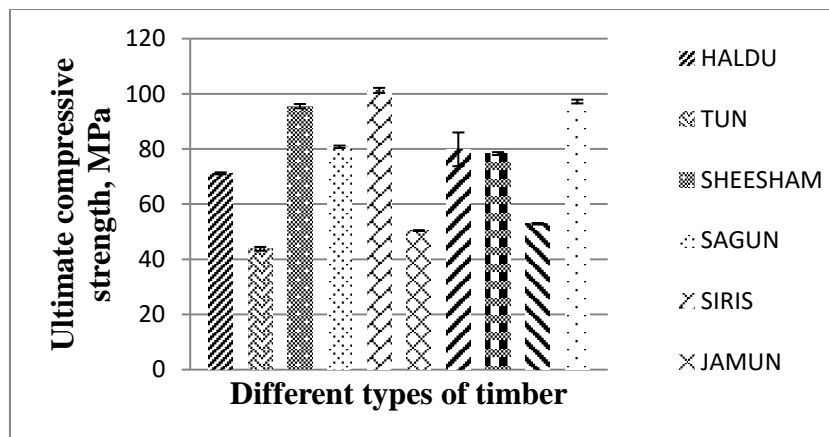

**Fig. 4. Ultimate Compressive strength with different types of timber**

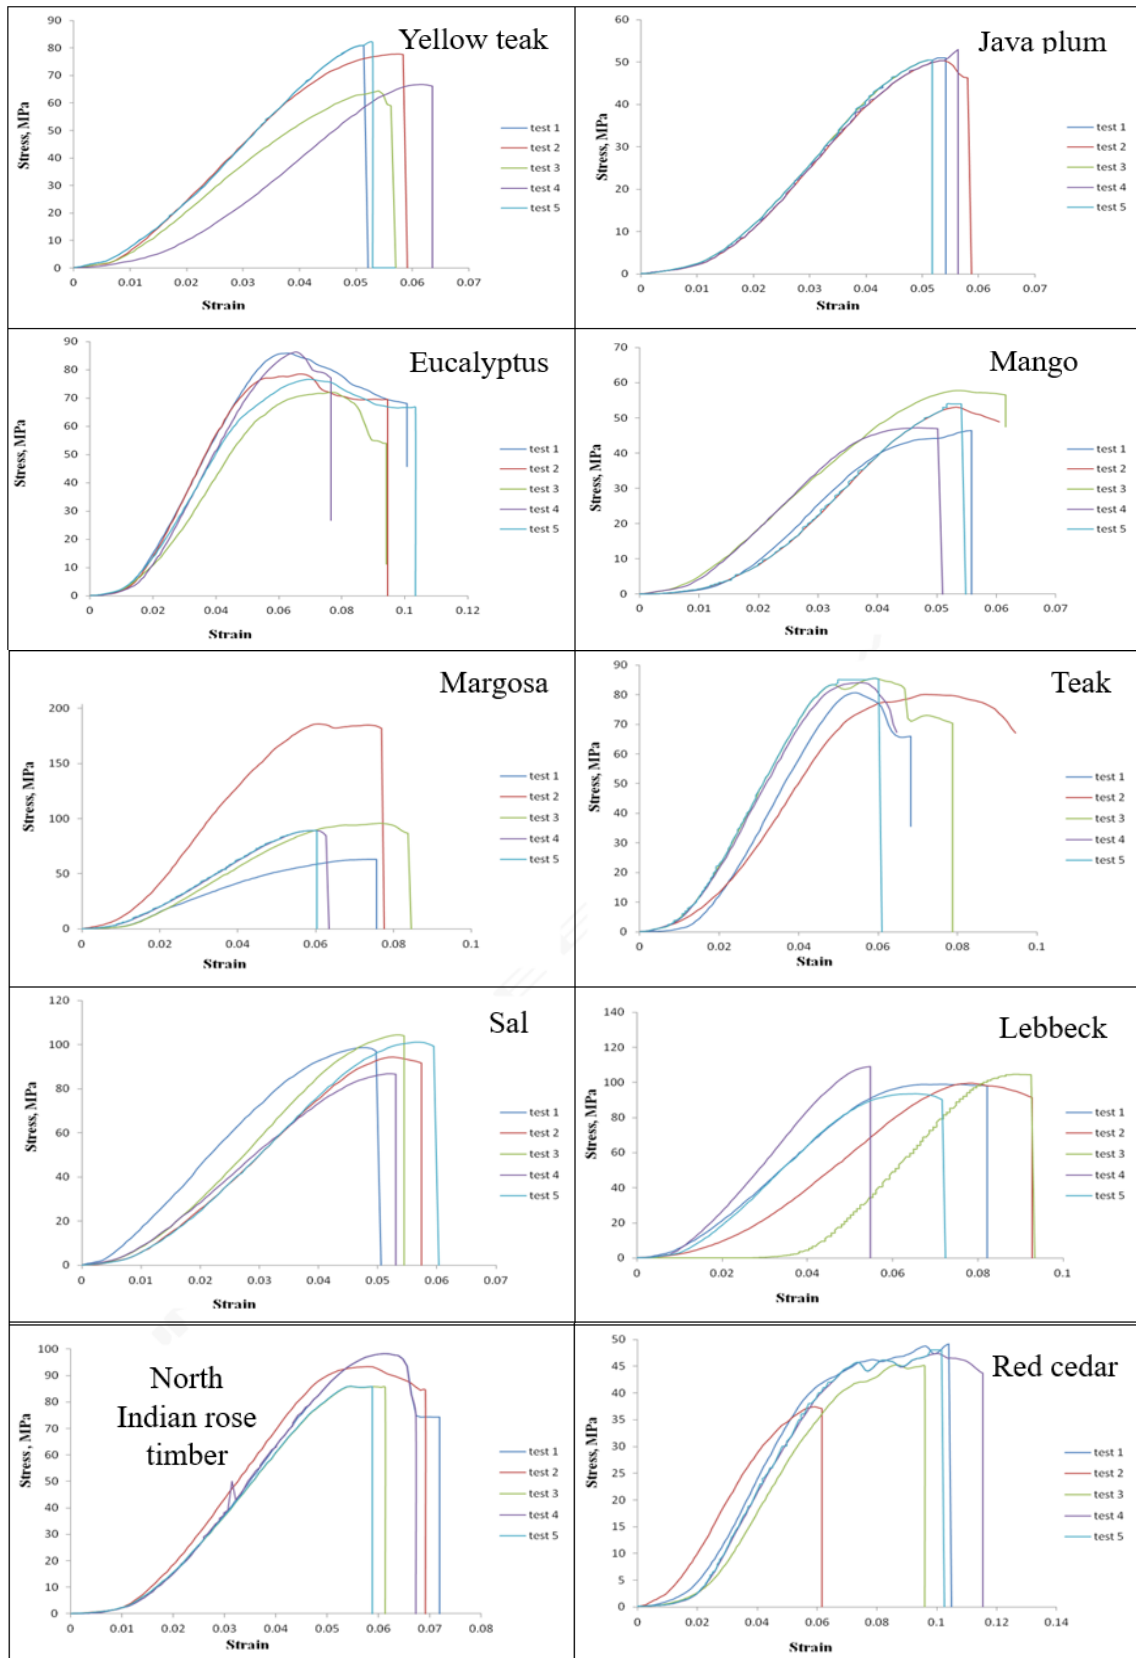

**Fig. 5.** The engineering stress-strain curve for different types of timber and strains from zero up to the specimen fracture

**Table 3. Analysis of variance**

Source of Variation	SS	df	MS	F	P-value	F crit
Factor	8267.1	9	918.56	12375.9	0.001	2.124
Error	2.97	40	0.074			
Total	8270.02	49				

#### 4. CONCLUSION

The molecular structure of timber, primarily composed of cellulose, hemicellulose, lignin, and extracts, plays a crucial role in its strength and durability. The selected timber species—Sheesham, Sal, Yellow Teak, Red Cedar, Teak, Margosa, Java Plum, Eucalyptus, Lebbeck, and Mango—were analyzed to determine their compressive strength, an essential factor for their application in agricultural implements. The results revealed significant variations in the compressive strength of different timber types, with North Indian Rose timber and Sal demonstrating the highest compressive strength, making them more suitable for agricultural tools requiring high strength. In contrast, Red Cedar exhibited the lowest compressive strength among the tested timbers. Furthermore, the study highlighted the importance of standard deviation in evaluating the consistency of the timber's mechanical properties. Mango timber showed the least variation in compressive strength, indicating its reliability. These findings align with previous research by Izeke D. N. and Fuwape J. A. [22] supporting the consistency and reliability of the data. In conclusion, the study provides essential data for selecting appropriate timber for agricultural implements, with North Indian Rose timber and Sal being the top choices due to their superior compressive strength. This research contributes to the efficient and effective use of natural resources in agricultural applications, promoting the use of durable and strong timber materials for enhanced performance and longevity of agricultural tools.

#### DISCLAIMER (ARTIFICIAL INTELLIGENCE)

Authors Hereby Declare That No Generative Ai Technologies, Such as Large Language Models (ChatGPT, Copilot, Etc.), And Text-To-Image Generators Have Been Used During the Writing or Editing of This Manuscript. The Content of This Research Paper Is the Result of Original Work by The Authors. Any Assistance Received from Ai Tools Has Been Explicitly Acknowledged and Limited to Non-Generative Functions, Such as Data Analysis, Proofreading, Or Formatting Support.

#### COMPETING INTERESTS

Authors have declared that no competing interests exist.

#### REFERENCES

1. Karthikeyan D. Veeraragavathatham D. Karpagam and Ayisha Firdo, Traditional tools in agricultural practices. *Ind. J. of Traditional Knowledge*. 2009;8(2):212-217.
2. Ahmadi H, Mollazade K. Effect of ploughing Depth and Soil Moisture content on Reduced Secondary Tillage, *Agricultural Engineering International: The CIGR EJournal*, Manuscript MES. 2009; 1195:XI.
3. Ahmed. Development and Testing of an Indigeneous Field Cultivator with sweep shovel. Unpublished Ph.D. thesis submitted to the faculty of Agriculture Engineering & Technology, University of Agriculture, Faisalabad; 2009.
4. ASTM D256, Standard test methods for determining impact strength the Izod pendulum impact; 1992.
5. ASTM D1037, Standard test methods for evaluating properties of timber-base fiber and particle panel materials; 1999.
6. Awan AR, Chughtai MI, Ashraf MY, Mahmood K, Rizwan M, Akhtar M, Siddiqui MT, Khan RA. Comparison for physical and mechanical properties of Eucalyptus camaldulensisdehn with conventional timbers. *Pak*. 2012;44(6):2067-2070.
7. Azmi A, Ahmad Z, Lum WC, Baharin A, Za'ba NI, Bhkari NM, Lee SH. Compressive strength characteristic values of nine structural sized malaysian tropical hardwoods. *Forests*. 2022;13(8):1172.
8. Adeyemi FO, Jimoh AA, Wilson UN. A review of mechanical strength properties of some selected timbers in Nigeria. *The International Journal of Science and Technoledge*. 2016;4(2):9
9. Gomes AF, Macarenhas FJ, de Almeida DH, Dias AM, Panzera TH, Lahr FA, Christoforo AL. Tropical wood species: alternative model to determine the characteristic compressive strength

- perpendicular to grain. Southern Forests: a Journal of Forest Science. 2023;85(1):19-25.
10. Wilson UN, Adedeji AA, Afolayan JO, Mohammed IS, Sani JE, Alomaja JA, Yoro KO. Reliability-based Investigation on the Compressive Strength of commonly used Nigerian Timber species. Malaysian Journal of Civil Engineering. 2022;34(1):1-0.
  11. Rani A, Singh J, Singh TP. An experimental characterization of physical properties of timber woods. Mater Sci Nanotechnol. 2017;1(2):41-45.42.
  12. Ali SI, Sharma P, Jaaffrey SNA. Study of Wear of Rotavator Blades Treated with Surface Hardening Processes. 2016;5:10.
  13. Arifa W, Aulin V, Shepelenko I. Improvements of harrows wear resistance. International Journal of Agricultural Research, Innovation and Technology. 2015;5(2):70-74.
  14. Armarego EJA, Brown RH. Mechanics of Metal Cutting the Influence of Specimen Size. In Fracture: Proceedings of the First Tewksbury Symposium, Held by the Faculty of Engineering, University of Melbourne, August 26th-30th, 1963 Butterworth. 1965;380.
  15. Fuwape JA. Timber utilization: From cradle to the grave. Inaugural lecture delivered at Federal University of Technology, Akure. 2000;1-33.
  16. Gamble SJ. A manual of Indian timbers. 1992;145.
  17. Hyeong Do Kweon, Jin Weon Kim, Ohseop Song, Dongho Oh. Determination of true stress-strain curve of type 304 and 316 stainless steels using a typical tensile test and finite element analysis. Nuclear Engineering and Technology. 2021;53:647-656
  18. Hassan Alli, Ummu Aiman Hishammuddin, Osman Mohd Tahir, Emran Mohd Taram and Ruhaizin Sulaiman Utilizing The Urban Tree Waste as Alternative for Furniture Lumber: A Case Study In Kuala Lumpur, Alam Cipta. 2021; 14:2.
  19. ISI (Indian Standards Institution) Indian standards method of testing small clear specimens of timber. IS: 1708, Bureau of Indian Standards (BIS), New Delhi. 1986; 36:6-10.
  20. Jiang JH, Lu JX, Ren HQ. Study on characteristic values for strength properties of Chinese Larchdimension lumber. J. Build. Mater. 2012;15:361–365.
  21. Zhao X, Lu JX, Jiang JH. Study on characteristic values of Chinese Larch dimension lumber bending properties. China Wood Ind. 2009;23:1–4.
  22. Izekor DN, Fuwape JA. Correlation between fibre length characteristics and mechanical properties of Tectona grandis timber, Journal of Applied and Natural Science. 2012;4(2):258-263.

**Disclaimer/Publisher's Note:** The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of the publisher and/or the editor(s). This publisher and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.

---

© Copyright (2024): Author(s). The licensee is the journal publisher. This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:

<https://www.sdiarticle5.com/review-history/119195>